




PRODUCT	NEXLER PREMIUM PYE PV250 S53H 0,5m	NEXLER PJ PYE PV200 S40 0,5m	NEXLER Stick 0,5m
THICKNESS	5,3 mm	4,0 mm	2,5 mm
ROLL LENGHT	5 m	7,5 m	10 m
FLEXIBILITY [°C]	-25°C	-20°C	-20°C
ELONGATION [%] LONGITUDINAL / TRANSVERSAL	50 / 50	50 / 50	4 / 4
TENSILE STRENGHT [N/50mm] LONGITUDINAL / TRANSVERSAL	1200 / 900	700 / 500	450 / 300
REINFORCEMENT	polyester	polyester reinforced with fibre glass	glass veil
STANDARD / SPECIAL WARRANTY	17 / 22 years	9 / 22 years	12 / 22 years

FLASHING bitumen membranes

cut to a width of 0.5m

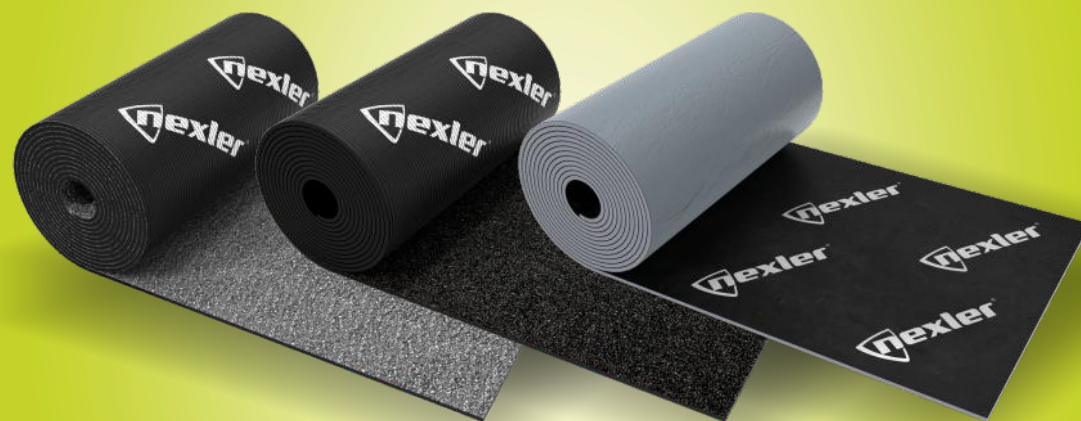

quick assembly




quick
assembly



easy
installation



perfect
for roof
flashing

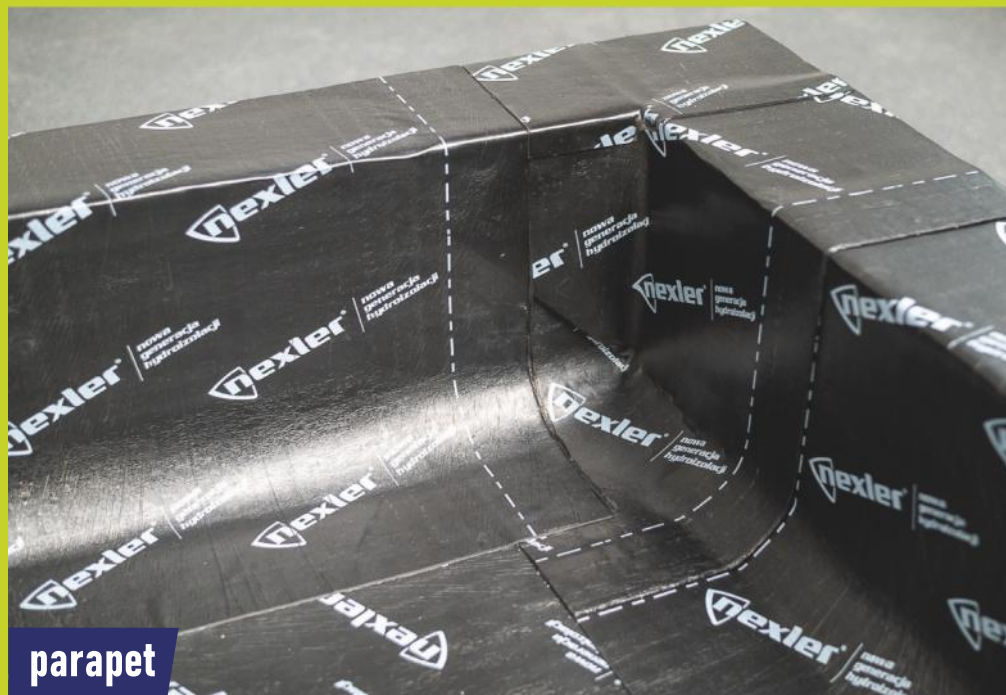

Advantages of flashing bitumen membranes

- △ recommended for installation on the ridge flashings, chimneys, attics, ventilation pipes, as a starter strip etc.
- △ cut to a width of 0,5 m
- △ quick installation on roofs and vertical flashings
- △ high flexibility in wide temperature range
- △ intended for use on any type of substrate, including thermal insulation layer



Flashing roofing membrane application

starter strip



inside corner



outside corner



roof penetrations